PAMA, spol. s r. o., Letenská 1918, 756 61 Rožnov pod Radhoštěm, Czech Republic
phone: +420 571654130, fax: +420 571654133, e-mail: pama@pamacorp.com, http://www.pamacorp.com

ANGLED FIBER PIGTAIL/PATCHCORD J-AP

Features

- Low insertion loss
- Low backreflection loss
- Custom-defined specifications
- Easy installation
- Environmentally stable

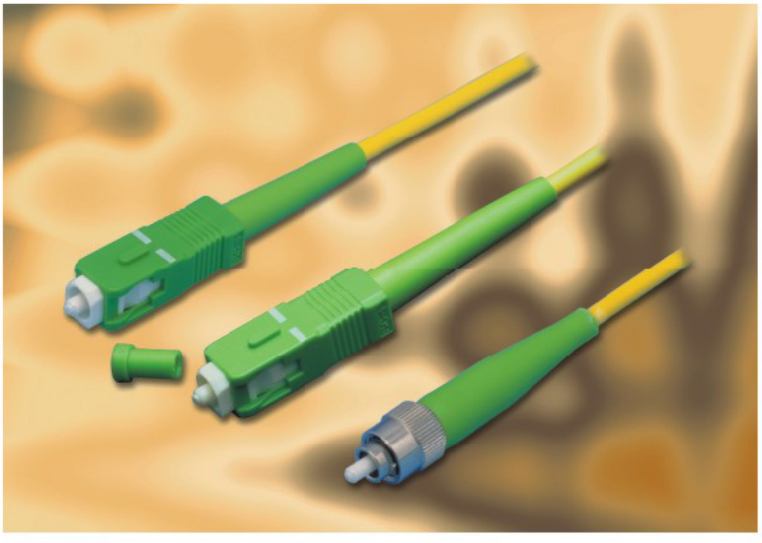

ITEM	Angled Fiber Pigtail / Patchcord	
Grade	S	H
Typical Insertion Loss, dB	0.15	0.30
Maximum Insertion Loss, dB	0.30	0.50
Typical Return Loss, dB	-67	-62
Minimum Return Loss, dB	-65	-60
Operating Temperature, °C	-40 ~ +75	
Storage Temperature, °C	-55 ~ +85	
Fiber Length	Any specified length	

J-□□-□□-AG-□-□□ □□-□□-□□/□□

Connector Type
AP.....FC/APC type
AS.....SC/APC type
HY.....Hybrid

Fiber Type
A.....Standard singlemode fiber
B.....Dispersion-shifted fiber (check availability)
X.....Others, please specify

Cable Type
C.....Simplex, coated fiber (250µm)
D.....Duplex PVC cable (3.0mm)
P.....Simplex, PVC 2.4mm cable
Q.....Simplex, PVC 3.0mm cable
T.....Simplex, tight buffer cable (900µm)
X.....Others, please specify

Grade
S.....Super H.....High

Pigtail/Patchcord Length
Please specify in meters. If centimeters is desired, please start with "X", followed by 3 digits

Configuration
SG.....Pigtail DB.....Patchcord

Connector Type (for both ends)
AP.....FC/APC type
AS.....SC/APC type
NC.....None